

10/501283

09 JUL 2004

10/501283

PCT/GB 2003 / 000148



REC'D 10 MAR 2003	
WIPO	PCT

INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## PRIORITY DOCUMENT


SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

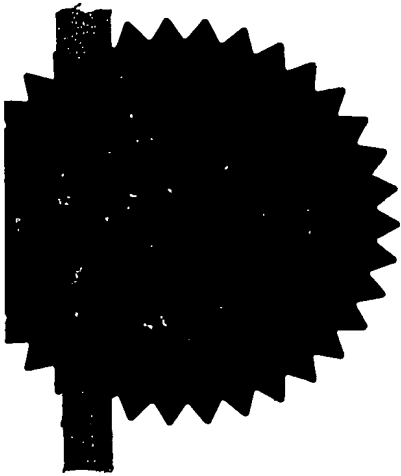

Signed

*Stephen Hordley*


Dated

18 February 2003

BEST AVAILABLE COPY

The  
Patent  
Office

30JAN02 E694789-1 D02835  
P01/7700 0.00-0202043.6

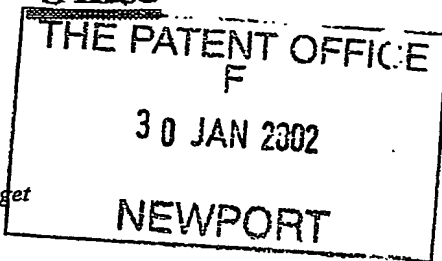

# Request for grant of a patent

(see the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road, Newport  
South Wales NP9 1RH

1.	Your reference	RMV/P400232		
2.	Patent application number (The Patent Office will fill in this part)	0202043.6		30 JAN 2002
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	MAINETTI (UK) LIMITED ANNFIELD ESTATE OXNAM ROAD, JEDBURGH ROXBURGHSHIRE SCOTLAND, TD8 6NN		
	Patents ADP number (if you know it)	4292645001		
	If the applicant is a corporate body, give the country/state of its incorporation	SCOTLAND		
4.	Title of the invention	APPARATUS AND METHOD FOR REMOVING ADHESIVE LABELS FROM GARMENT HANGERS		
5.	Name of your agent (if you have one)	URQUHART-DYKES & LORD ST NICHOLAS CHAMBERS AMEN CORNER NEWCASTLE UPON TYNE NE1 1PE		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)			
	Patents ADP number (if you know it)	00001644019		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (If you know it)	Date of filing (day/month/year)
		ITALY	UD2002A000005	15/01/02
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8.	Is a statement of inventorship and or right to grant of a patent required in support of this request? (Answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body; see note (d))	YES		

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description 9

Claim(s) 3

Abstract 3

Drawing(s) 3 & 3

- 10 If you are also filing any of the following items state how many against each item:

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (patents form 7/77)

Request for preliminary examination and search (patents form 9/77)

Request for substantive examination (patents form 10/77)

Any other documents (please specify)

11

I/We request the grant of a patent on the basis of this application.

Signature

Date 29/01/02

  
URQUHART-DYKES & LORD

- 12 Name and daytime telephone number of person to contact in the United Kingdom

MARTIN VINSOME - 0191 2618573

#### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patent Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

a) if you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered "Yes" Patents Form 7/77 will need to be filed

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

-1-

Apparatus and Method for Removing Adhesive Labels  
From Garment Hangers

The present invention relates to an apparatus and method for removing adhesive labels from garment hangers, and relates particularly, but not exclusively, to such an apparatus and method for removing adhesive labels from garment hangers to permit recycling of the hangers.

Many garment hangers for use in displaying garments for sale in retail outlets consist of a hanger body of plastics material, for supporting a garment, from which a hook of metal or plastics material for suspending the hanger extends. Indications of various sizes of garment are provided by means of labels, usually of paper, attached to the body of the hanger by means of adhesive, or by means of size markers mounted to the hook of the hanger.

A significant proportion of such hangers are recycled, and in order to enable recycling to take place, the hanger must be separated into its different constituent materials. Adhesive labels are presently removed from hanger bodies by means of a hand-held hot air gun which melts the adhesive attaching the label to the hanger body. This known method of label removal suffers from a number of disadvantages. Firstly, the use of handheld air guns is very labour intensive and makes the process very costly, especially when large numbers of hangers are to be recycled. Also, the use of hot air involves a risk of damaging the plastics material of the hanger body if the temperature or length of application of the hot air is not within carefully controlled limits.

Preferred embodiments of the present invention seek to overcome the above disadvantages of the prior art.

According to the present invention, there is provided an apparatus for removing adhesive labels from garment hangers, the apparatus comprising:

washing means adapted to direct pressurised liquid onto an adhesive label of at least one garment hanger for melting adhesive of said label and removing said label from the hanger;

loading means for transporting the or each said hanger towards said washing means;

unloading means for transporting the or each said hanger away from said washing means; and

drying means for drying the or each said hanger subsequently to removal of an adhesive label therefrom.

By directing liquid onto the adhesive label of one or more hangers, this provides the advantage that the liquid can be used to simultaneously melt the adhesive of the label and remove the label from the hanger, which makes the process is suitable for automation. This in turn provides the advantage that labels can be removed from hangers with greater efficiency and cost-effectiveness.

The loading means preferably comprises at least one rotatable shaft having a respective helical groove for engaging a hook of at least one said hanger, wherein rotation of the or each shaft about its respective longitudinal axis in use moves hangers along the or each said shaft towards said washing means.

By providing loading means having at least one rotatable shaft having a respective helical groove for engaging a hook of at least one hanger, this provides the advantage that the hangers can be easily and rapidly loaded onto the or each shaft.

At least one said rotatable shaft preferably has a respective groove-free portion for receiving at least one said hanger prior to movement of the hanger towards the washing means.

This provides the advantage of enabling hangers to be rapidly placed on the or each shaft but minimises the risk of the hangers becoming tangled.

In a preferred embodiment, the depth of at least one said groove increases in use in a direction towards said washing means.

This provides the advantage of enabling successive hangers on a shaft to be separated prior to washing thereof.

The washing means may comprise spraying means for directing at least one stream of liquid at elevated temperature onto an adhesive label of at least one hanger.

The spraying means is preferably adapted to direct at least one said stream in a side-to-side and/or up and down motion.

This provides the advantage of assisting in removing the labels from the hangers.

The apparatus may further comprise recycling means for recycling said liquid subsequently to spraying thereof onto at least one hanger.

The unloading means may comprise at least one rotatable shaft having a respective helical groove for engaging a hook of at least one said hanger, wherein rotation of the or each shaft about its respective longitudinal axis in use moves hangers along the or each said shaft away from said washing means.

The drying means may at least partially surround said unloading means.

The drying means may comprise an elongate chamber for drying at least one said hanger.

In a preferred embodiment, the apparatus further comprises further drying means for at least partially drying at least one hanger subsequently to washing thereof and prior to transport thereof by said unloading means.

This provides the advantage of removing the bulk of the liquid from the hanger subsequently to washing, so that the time a hanger spends adjacent the drying means can be minimised.

The apparatus may further comprise support means for supporting a hanger during washing thereof by said washing means.

The support means may comprise a rotary support member for supporting at least one hanger and adapted to rotate to move the or each said hanger from a position facing said loading means to a position facing said washing means and/or from a position facing said washing means to a position facing said unloading means.

The apparatus may further comprise locking means for locking at least one said hanger in position on said rotary member.

The locking means may comprise at least one hook receiving member for receiving a respective hook of a hanger, and is adapted to lock at least one hanger in position on said rotary member in response to receiving a hook on at least one said hook receiving member.

A preferred embodiment of the invention will now be described, by way of example only and not in any limitative sense, with reference to the accompanying drawings in which:-

Figure 1 is a schematic perspective view of a label removal apparatus embodying the present invention;

Figure 2 is a schematic perspective view from inside of a rotary support means of the apparatus of Figure 1; and

Figure 3 is a schematic perspective view from outside of the rotary support means of Figure 2.

Referring to Figure 1, an apparatus 1 for removing adhesive labels from garment hangers includes an input conveyor 2 for receiving garment hangers (not shown) and which terminates in a loading station 3 for loading the hangers onto a rotatable support 4. The support 4 faces a washing station 5, a pre-drying station 6 and an unloading station 7 for unloading hangers from the support 4 onto an output conveyor 8 which passes through an elongate drying chamber 9.

The input conveyor 4 includes four rotatable shafts 10 adapted to be rotated about their longitudinal axis by means of respective motors 11. The shafts 10 are each provided with three sections. The first section, at the end of the shaft 10 remote from the loading station 3, is flat and free of grooves, so that hangers can be rapidly placed on the shaft 10 without becoming tangled. The second section, which extends from the first section, has a helical groove (not shown) for receiving a hook of a garment hanger, so that the hangers on the shaft 10 separate as their hooks engage the groove. The third section, at the end of the shaft 10 nearest to the loading station 3, has a deeper groove and separates the hangers further as they



are transported in the direction of arrow A along the shafts 10.

At loading station 3, the hangers are fed from the ends of shafts 10 onto the support 4, which is rotatable about axis 12. Referring to Figure 2, which shows in greater detail that part of the rotatable support 4 which faces the loading station 3, the support 4 is generally octagonal in external shape, and includes eight pairs of hanger receiving plates 13 (only one pair being shown in Figure 2), the plates 13 of each pair being located one on top of the other. Each of the plates 13 is provided with a rod 14 on which the hook of a hanger is received from the end of a shaft 10 at the receiving station 3. A clamp 15 has a pair of arms 16 which are slidable in corresponding apertures in an upper flange 17 of the corresponding plate 13, and each of the arms 16 is provided with an angled end portion 18 which rests on an upper part of the body of the hanger to hold the hanger in position against the plate 13 when the arms 16 are urged downwardly relative to the flange 17. The angled end portions 18 are arranged to hold a hanger in position against the corresponding plate 13 regardless of the shape or size of the hanger. The two clamps 15 are connected to each other by means of a frame 19 which is urged downwardly relative to the plates 13 by means of a cylinder 20 and held in the lower position by means of a cylinder 21 which engages a lock 22. The cylinder 20 is activated by means of the rods 14, so that the clamps 15 are automatically activated as the hangers are hung on the corresponding rods 14. Each of the plates 13 is also provided with a piston 23 for urging a plate (not shown) outwards to remove a hanger from the plate 13. The function of the pistons 23 will be explained in greater detail below.

The support 4 is arranged such that two adjacent pairs of plates 13 face the loading station 3. The hangers facing

loading station 3 are then transferred to washing station 5 by rotation of the support 4 through 90 degrees about axis 12. At the same time, four further hangers are loaded onto the support 4 at loading station 3.

The washing station 5 includes four water guns (not shown), each of which directs a thin high pressure and high temperature jet of water at the label area of a hanger in an up and down or side to side motion. The high temperature of the water causes the adhesive of the labels to melt, and the force of the spray removes the label and forces it into a collection chamber at the lower part of the washing station 5, where the water, label and adhesive residue are removed for cleaning. The water cleaning is carried out by means of a water purification system, which enables the water to be reused after cleaning. It has been found that the pressure of the water from the water guns should not exceed 120 bar, and the water is applied for about 2 seconds at a temperature of approximately 80° Celsius. Temperatures higher than this should be avoided to minimise the risk of warping of the plastic material of the hangers.

By rotation of the support 4 through a further 90° about axis 12, the four hangers facing the washing station 5 are then brought into a position in which they face pre-drying station 6, which delivers a short blast of high pressure air to remove the majority of the water from washing station 5 from the hangers. Again, with each rotation of the support 4 through 90°, four further hangers are loaded onto the support 4 at loading station 3.

By rotation of support 4 through a further 90°, the hangers are brought to unloading station 7. At the unloading station 7, which is very similar in construction to the loading station 3, pistons 23 are activated to eject the four hangers from the two pairs of adjacent plates 13 facing the unloading station 7,

which causes the hangers to be loaded onto four rotatable shafts 24 of unloading conveyer 8. The rotatable shafts 24 of the unloading conveyer 8 are similar in construction to the rotatable shafts 10 of loading conveyer 2, each shaft 24 being rotatable about its longitudinal axis by means of a motor 25. The drying station 9 consists of a tunnel about 6 metres long operating at a temperature of 70°C.

The operation of the apparatus will now be described.

Hangers to recycled are loaded manually onto input conveyer 2 and are transported by the conveyer in the direction of arrow A in figure 1. The hangers are then loaded onto the support 4 at loading station 3, secured to the support, and the support is then rotated through 90° to bring the hangers to washing station 5. This rotation brings four further plates 13 into a position facing the loading station 3, which permits four further hangers to be loaded at loading station 3 onto the support 4. The labels are removed from the hangers at washing station 5, and the de-labelled hangers are then delivered to pre-drying station 6 by rotation of the support through a further 90° about axis 12. The majority of the water is removed at pre-drying station 6, which minimises the required power of the drying station 9, and the hangers are then delivered to unloading station 7 by rotation through a further 90°, where they are unloaded from the support 4 and transported through drying station 9 by means of unloading conveyer 8 in the direction of arrow B. At the end region 26 of unloading conveyer 8, the hangers are manually removed from shafts 24 for recycling.

It will be appreciated by persons skilled in the art that the above embodiment has been described by way of example only, and not in any limitative sense, and that various alterations and

-9-

modifications are possible without departure from the scope of the invention as defined by the appended claims.

CLAIMS

1. An apparatus for removing adhesive labels from garment hangers, the apparatus comprising:

washing means adapted to direct pressurised liquid onto an adhesive label of at least one garment hanger for melting adhesive of said label and removing said label from the hanger;

loading means for transporting the or each said hanger towards said washing means;

unloading means for transporting the or each said hanger away from said washing means; and

drying means for drying the or each said hanger subsequently to removal of an adhesive label therefrom.

2. An apparatus according to claim 1, wherein the loading means comprises at least one rotatable shaft having a respective helical groove for engaging a hook of at least one said hanger, wherein rotation of the or each shaft about its respective longitudinal axis in use moves hangers along the or each said shaft towards said washing means.

3. An apparatus according to claim 2, wherein at least one said rotatable shaft has a respective groove-free portion for receiving at least one said hanger prior to movement of the hanger towards the washing means.

4. An apparatus according to claim 2 or 3, wherein the depth of at least one said groove increases in use in a direction towards said washing means.

5. An apparatus according to any one of the preceding claims, wherein said washing means comprises spraying means for directing at least one stream of liquid at elevated temperature onto an adhesive label of at least one hanger.

6. An apparatus according to claim 5, wherein said spraying means is adapted to direct at least one said stream in a side-to-side and/or up and down motion.

7. An apparatus according to claim 5 or 6, further comprising recycling means for recycling said liquid subsequently to spraying thereof onto at least one hanger.

8. An apparatus according to any one of the preceding claims, wherein said unloading means comprises at least one rotatable shaft having a respective helical groove for engaging a hook of at least one said hanger, wherein rotation of the or each shaft about its respective longitudinal axis in use moves hangers along the or each said shaft away from said washing means.

9. An apparatus according to any one of the preceding claims, wherein said drying means at least partially surrounds said unloading means.

10. An apparatus according to claim 9, wherein said drying means comprises an elongate chamber for drying at least one said hanger.

11. An apparatus according to any one of the preceding claims, further comprising further drying means for at least partially drying at least one hanger subsequently to washing thereof and prior to transport thereof by said unloading means.

12. An apparatus according to any one of the preceding claims, further comprising support means for supporting a hanger during washing thereof by said washing means.

13. An apparatus according to claim 12, wherein said support means comprises a rotary support member for supporting at least one hanger and adapted to rotate to move the or each said hanger from a position facing said loading means to a position facing said washing means and/or from a position facing said washing means to a position facing said unloading means.

14. An apparatus according to claim 13, further comprising locking means for locking at least one said hanger in position on said rotary member.

15. An apparatus according to claim 14, wherein said locking means comprises at least one hook receiving member for receiving a respective hook of a hanger, and is adapted to lock at least one hanger in position on said rotary member in response to receiving a hook on at least one said hook receiving member.

16. An apparatus for removing adhesive labels from garment hangers, the apparatus substantially as hereinbefore described with reference to the accompanying drawings.

- 113 -

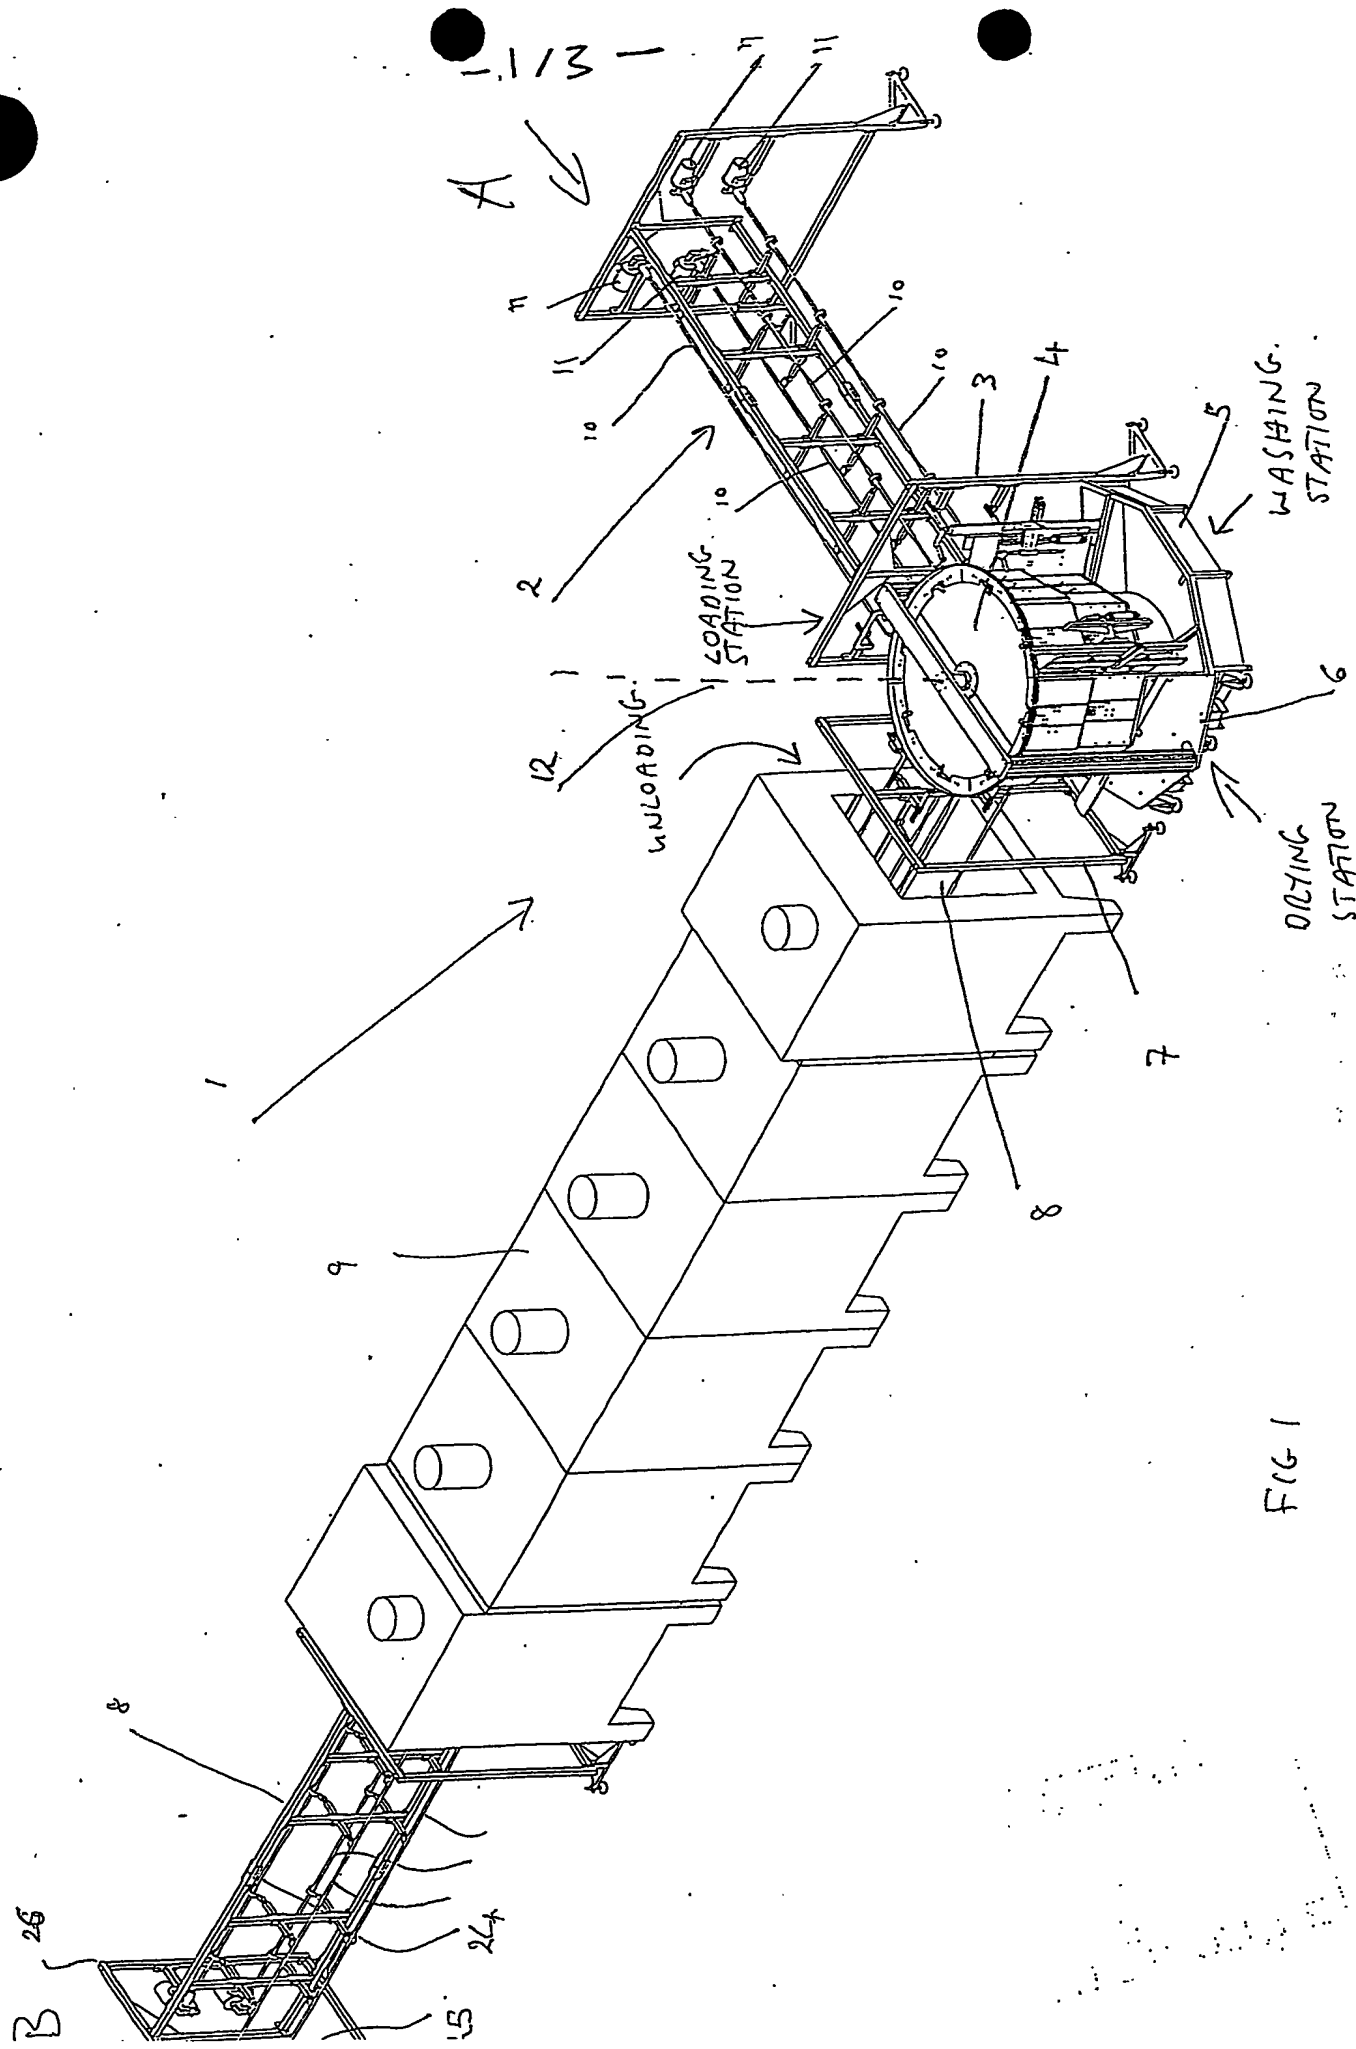


FIG 1




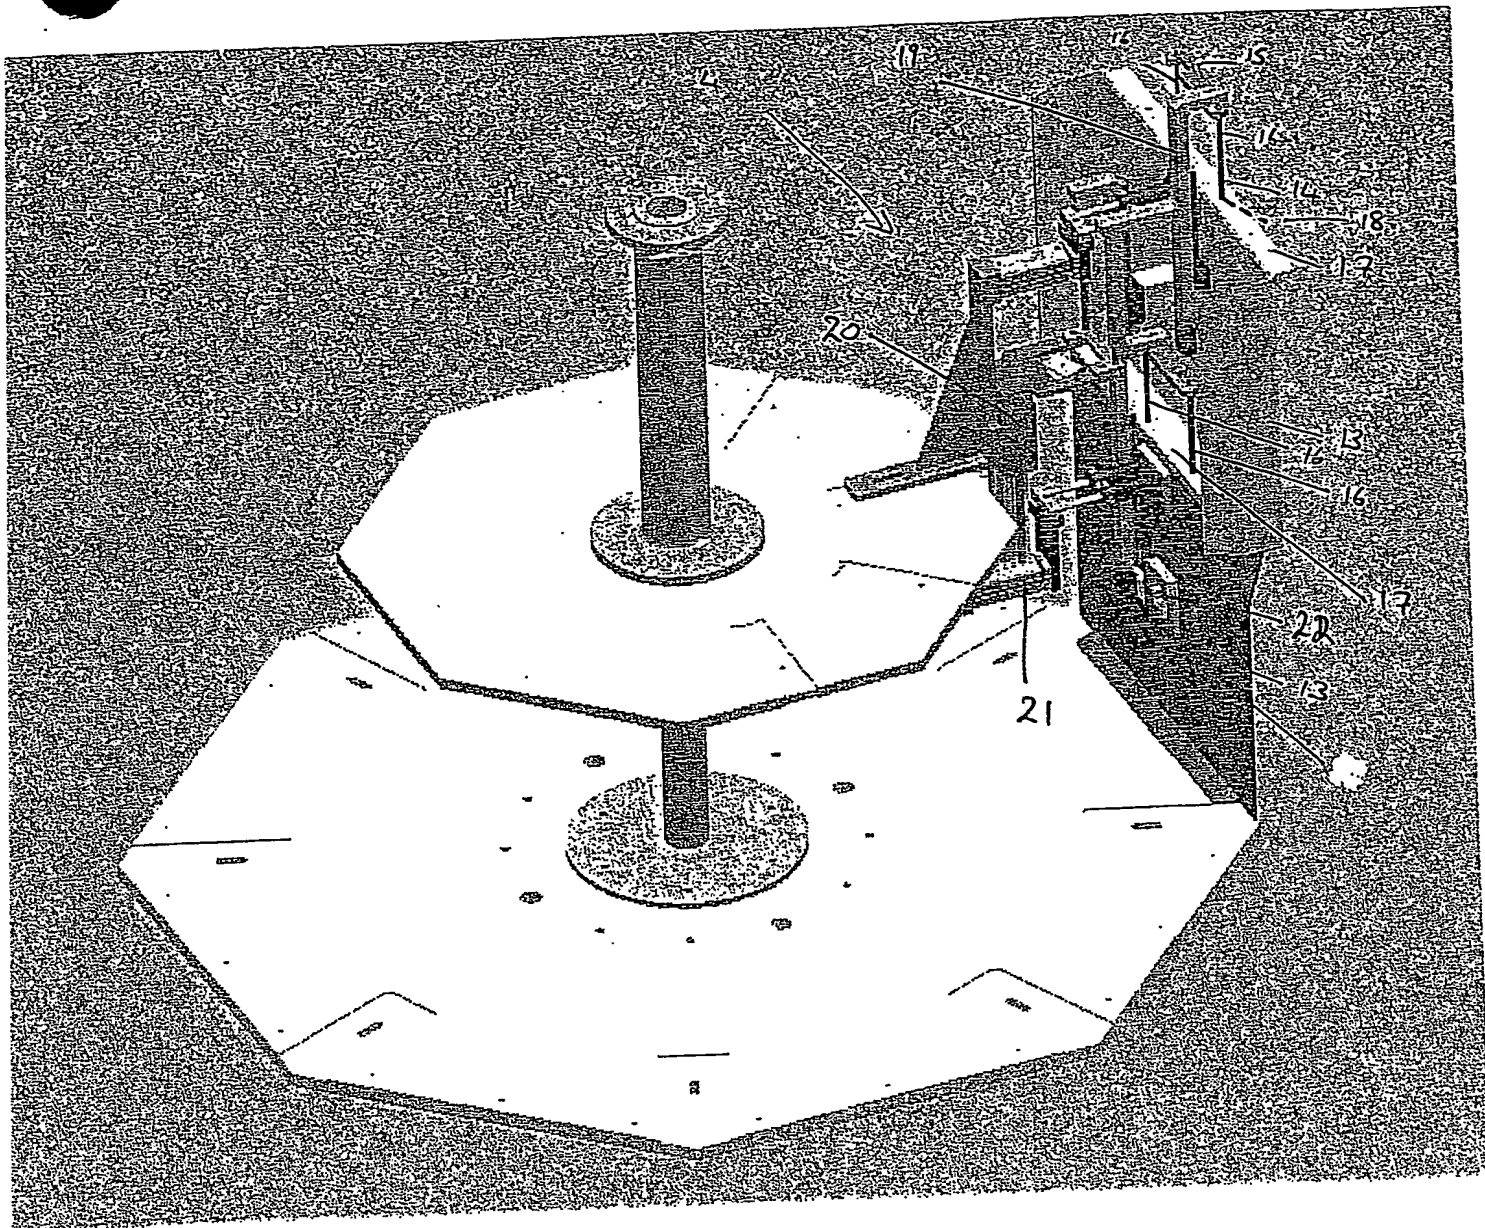


FIG 2

- 313 - UNSTATION

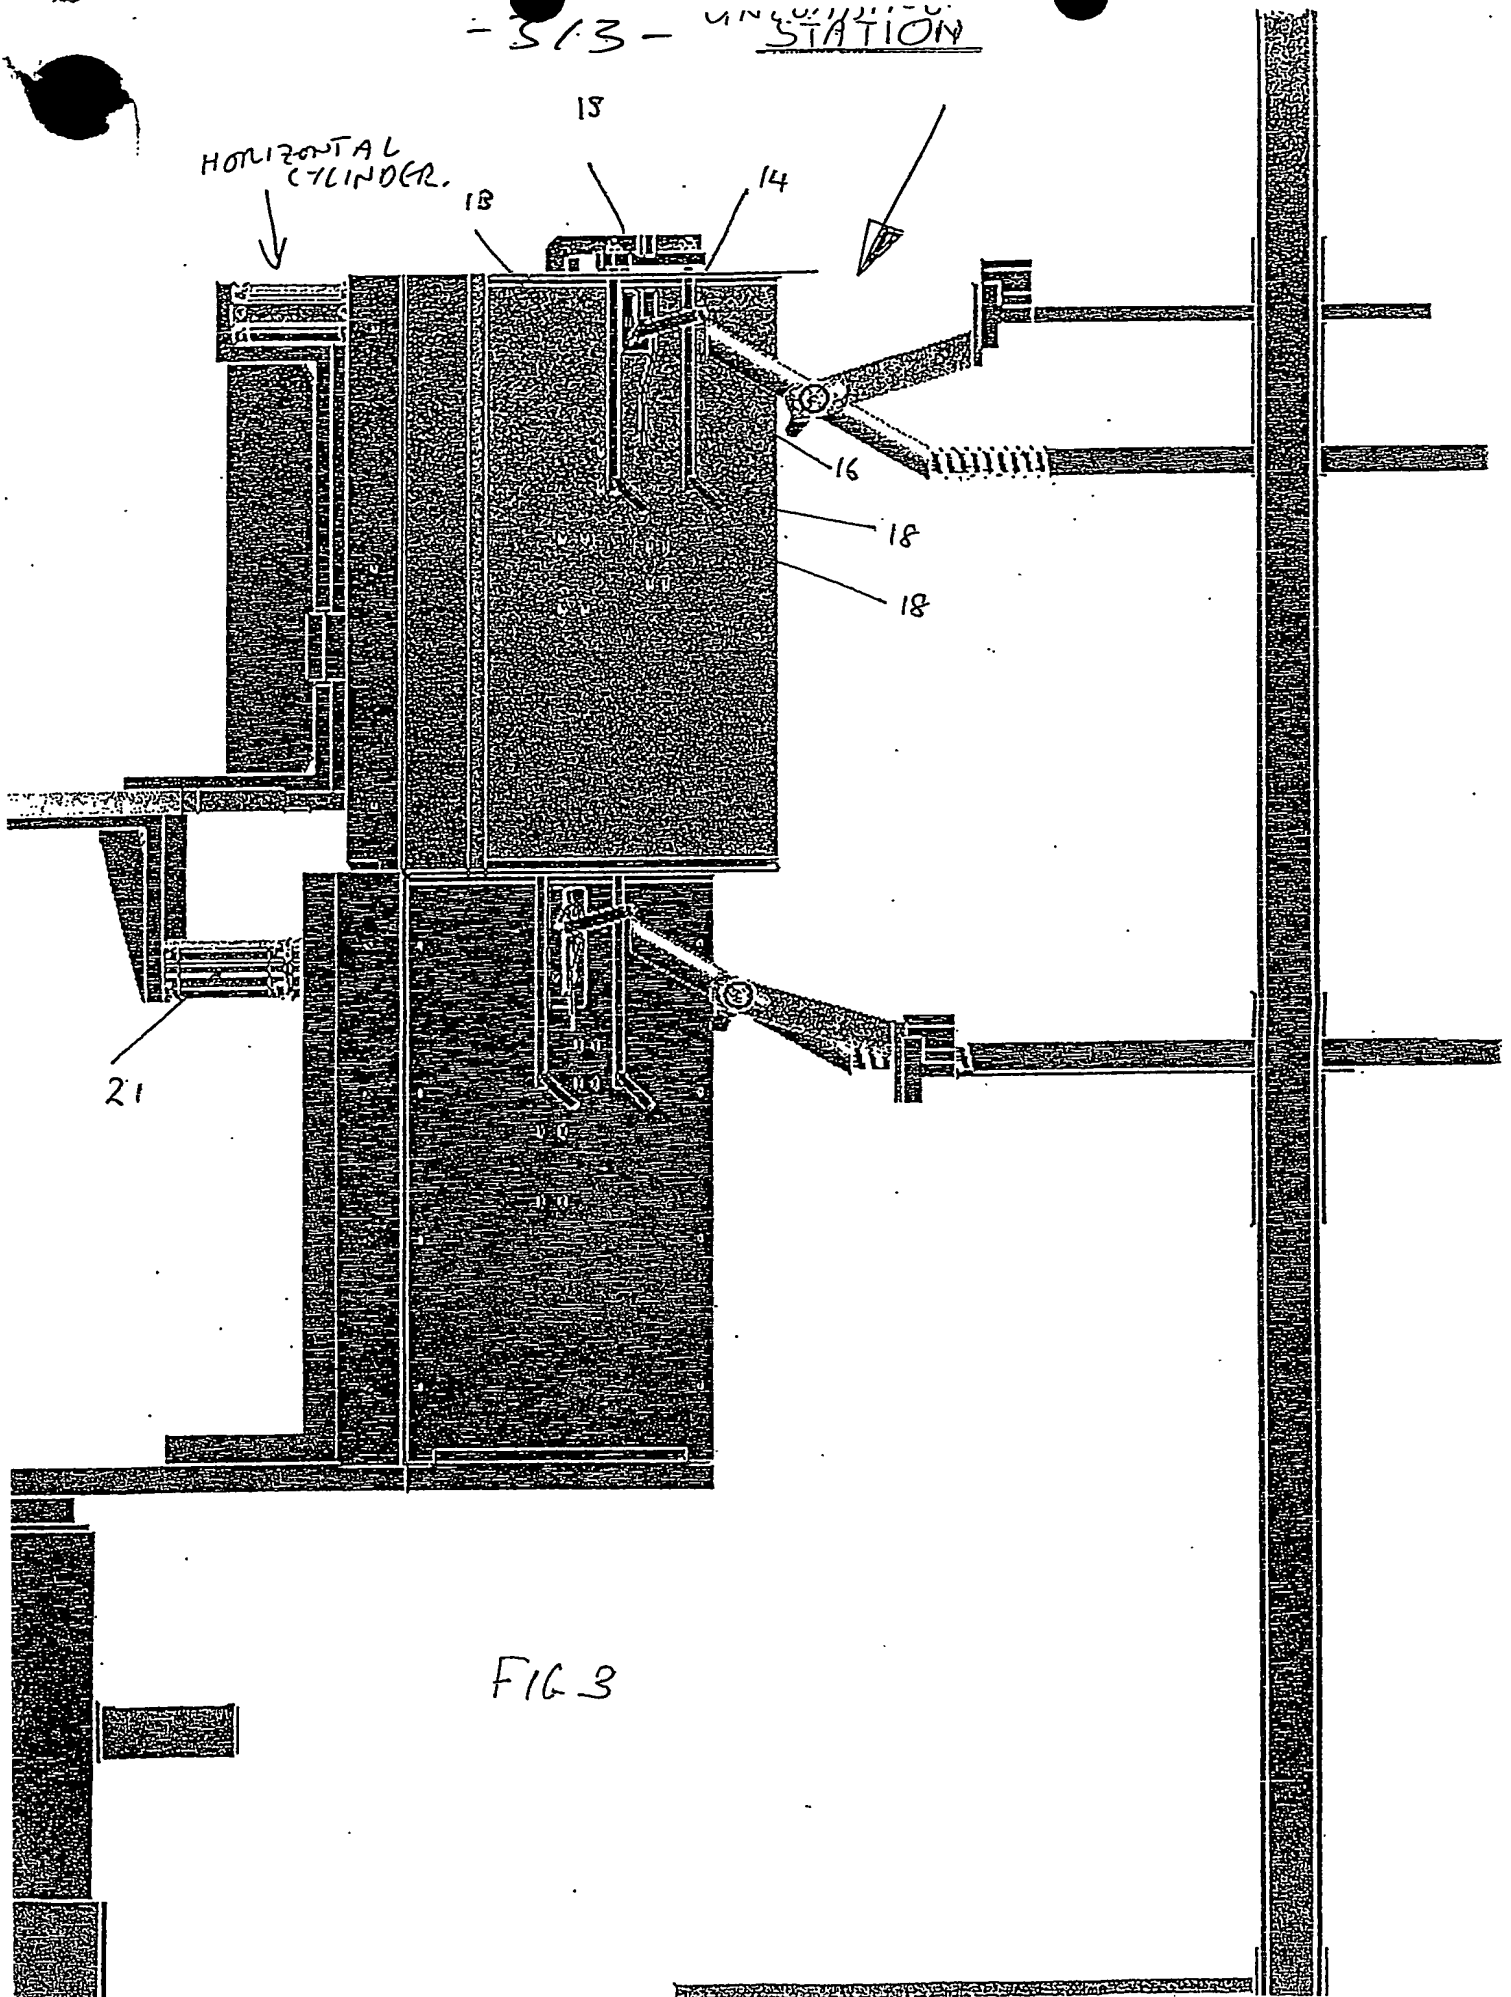

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**